



FIRST  
ON THE  
WATER™

## NRS BIGHORN I FRAME

### Components:

- (2) Side Rails
- (2) Cross Bars
- (1) Seat Bar
- (1) Foot Bar
- (10) U-Bolts
- (20) Washers and Locking Nuts
- (2) 9' Straps
- (4) Strap Slides
- (1) Frame Wrench
- (1) Pair of Oar Mounts
- (1) Padded Raft Seat



Note: Seat is packaged separately.

### Directions:

1. Lay out the frame parts as shown in the image above.
2. Set the seat, foot, and cross bars in place and add the U-bolts, nuts and washers leaving them loose. Be sure that the side marked "Front" on the seat plate faces forward. Adjust the cross bars so that they fit against the cooler or dry box snugly. If any of the bars need to be repositioned, it may be necessary to remove the U-bolts to make adjustments.

Note: See backside for strap slide instructions.


3. Add seat, oar mounts, and straps.
4. Check to be sure that all of the U-bolts are tight. Periodically check the tightness of all nuts and bolts.

2009  
S. Main Street  
Moscow, ID 83843  
800-635-5202  
www.nrsweb.com



FIRST  
ON THE  
WATER™

## Strap Slide Instructions

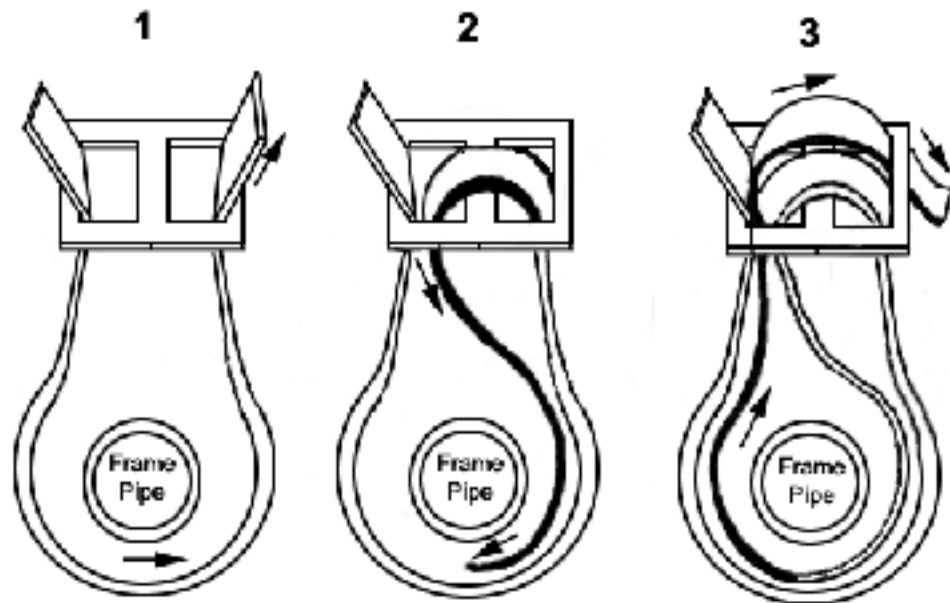

1. Feed your strap end through one slot in the slide, around your frame pipe, and back up through the other slot in the slide. At this point, keep the loop very loose, with plenty of space between the loop and the frame pipe.
2. Now go down through the first slot and back around the frame pipe in the opposite direction. You will be creating a second loop inside the first one.
3. Bring the end of the strap back up through the first slot and down through the second slot. Now tighten the double loops around the frame pipe. As you do so, be sure to leave enough slack in the strap to go under whatever you are tying down, AND enough end on the strap to be able to loop back over your load and reach back to the buckle.

2009

S. Main Street  
Moscow, ID 83843  
800-635-5205  
www.nrsweb.com